

TRU FLOOR

Roberto Paoli

Scultoreo, sottile, ridotto: due pannelli luminosi formano un parallelepipedo, lasciando spazio a una fessura vuota, ma nascondendo la sorgente luminosa attraverso un effetto ottico.

Realizzata in alluminio, Tru fornisce un'illuminazione indiretta e diffusa attraverso due strisce LED interne e un elemento LED sulla parte superiore. Dotata di una doppia dimmerazione per il controllo indipendente delle due sorgenti luminose.



2700K

LAMPING

Source	linear LED + LED board
Total power	16+33W
Emission	up + back, indirect
Switching	double switch, dimmer on board
Tension	110-240V
Color temperature	2700K
Luminous flux	2125lm (up)+1765lm (back)
Typ CRI	85
IP class	20
Materials	aluminium + PC
Notes	cable length 3,3m
Net lamp weight	9 kg

Codes

TRU LWW 25
TRU LNN 25
TRU LDD 25
TRU LGG 25


Structure

white
black
titan grey
gold painted

PACKAGE

Package 01	Dimension: 28x26x20 cm / Gross weight: 8 kg
Package 02	Dimension: 22x17x191 cm / Gross weight: 4 kg

Certificazioni

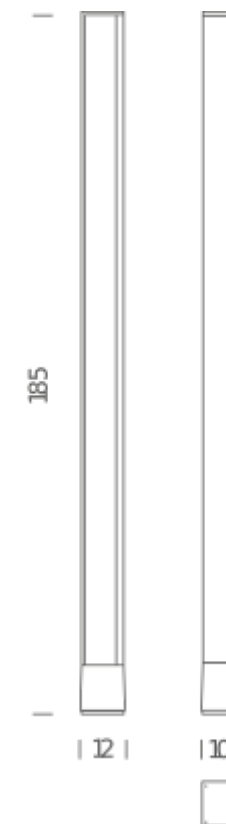

3000K

LAMPING

Source	linear LED + LED board
Total power	16+33W
Emission	up + back, indirect
Switching	double switch, dimmer on board
Tension	110-240V
Color temperature	3000K
Luminous flux	2125lm (up) +1765lm (back)
Typ CRI	85
IP class	20
Materials	aluminium + PC
Notes	cable length 3,3m
Net lamp weight	9 kg

Codes

TRU LWW 24
TRU LNN 24
TRU LDD 24
TRU LGG 24

Structure

white
black
titan grey
gold painted

PACKAGE

Package 01	Dimension: 28x26x20 cm / Gross weight: 8 kg
Package 02	Dimension: 22x17x191 cm / Gross weight: 4 kg

Certificazioni

